

## Keystone Designer Series Panel System

**Model Number**  
**WK - Y** **24 E** - - -

**Ordering Information**

**Panel Series**  
**L** L-Series  
**R** R-Series

**Panel Configuration**  
**1** 1x24, 1RU Only  
**2** 2x24, 2RU Only


**Rack Height**  
**1** 1 Rack Unit 1.75", 44mm  
**2** 2 Rack Unit 3.50", 89mm

**Installed Rear Pivoting Designation Option**  
**RPD** Rear Pivoting Designation


**Installed Cable Bar Option**  
**BZ** No Cable Bar  
**B38** 4", 100mm, Cable Bar, 1RU Only  
**B41** 6", 150mm, Cable Bar, 1RU Only  
**B40** 4", 100mm, Cable Bar, 2RU Only  
**B43** 6", 150mm, Cable Bar, 2RU Only

**Loaded Jackfields**

<b>Z</b>	Panel Only, no modules, black CIS
<b>Ethernet</b>	
<b>6AFS</b>	Cat6A*, RJ45, Shielded, Feedthru, female to female, black CIS
<b>^6AS</b>	Cat6A*, RJ45, Shielded, Tool-less or 110/Krone Punchdown, 23-26AWG, stranded or solid, black CIS *For Cat3 to Cat6A shielded/unshielded applications
<b>6FS</b>	Cat6**, RJ45, Shielded, Feedthru, female to female, Shielded, black CIS
<b>^6S</b>	Cat6**, RJ45, Shielded, Tool-less or 110/Krone Punchdown, 23-26AWG, stranded or solid, black CIS **For Cat3 to Cat6 shielded/unshielded applications ^ These connectors are shipped loose, require termination before insertion into panel.
<b>Fiber Optic LC</b>	
<b>MMD-LC-BG</b>	LC MM DX OM1/2 Beige Adapter, Zirconia Sleeve, SC Footprint, Adapter Plate(s) and/or Hardware
<b>MMD-LC-AQ</b>	LC MM DX 10G OM3/4 Aqua Adapter, Zirconia Sl., SC Footprint, Adapter Plate(s) and/or Hardware
<b>MMD-LC-MG</b>	LC MM DX 10G OM4 Magenta Adapter, Zirconia Sl., SC Footprint, Adapter Plate(s) and/or Hardware
<b>SMD-LC-BL</b>	LC SM DX Blue Adapter, Zirconia Sleeve, SC Footprint, Adapter Plate(s) and/or Hardware
<b>SMD-LC-GN</b>	LC/APC SM DX Green Adapter, Zirconia Sleeve, SC Footprint, Adapter Plate(s) and/or Hardware
<b>Fiber Optic SC</b>	
<b>MMS-SC-BG</b>	SC MM SX OM1/2 Beige Adapter, Polymer Housing, Zirconia Sleeve, Adapter Plate(s) and/or H/W
<b>MMS-SC-AQ</b>	SC MM SX 10G OM3/4 Aqua Adapter, Polymer Housing, Zirconia Sl., Adapter Plate(s) and/or H/W
<b>MMS-SC-MG</b>	SC MM SX 10G OM4 Magenta, Adapter, Polymer Housing, Zirconia Sl., Adapter Plate(s) and/or H/W
<b>SMS-SC-BL</b>	SC SM SX Blue Adapter, Polymer Housing, Zirconia Sleeve, Adapter Plate(s) and/or Hardware
<b>SMS-SC-GN</b>	SC/APC SM SX Green Adapter, Polymer Housing, Zirconia Sleeve, Adapter Plate(s) and/or Hardware
<b>Fiber Optic ST</b>	
<b>MMS-ST</b>	ST MM SX OM1/2/3/4 Metal Adapter, Zirconia Sleeve
<b>MMS-ST-DC</b>	ST MM SX OM1/2/3/4 Metal Adapter, Zirconia Sleeve, 1 Metal Dust Cap & Chain
<b>SMS-ST</b>	ST SM SX Metal Adapter, Zirconia Sleeve
<b>SMS-ST-DC</b>	ST SM SX Metal Adapter, Zirconia Sleeve, 1 Metal Dust Cap & Chain
<b>BNC - 75 ohm &amp; 50 ohm</b>	
<b>JJ300R</b>	BNC Feedthru, 24 GHz, AVP JJ300, 75 ohm, semi-recessed, F-F, premium 5u gold plating
<b>JJ200R</b>	BNC Feedthru, 12 GHz, AVP JJ200, 75 ohm, semi-recessed, F-F, standard gold flash
<b>BNC50-FR</b>	BNC Feedthru, 50 ohm Coaxial, semi-recessed, female-female

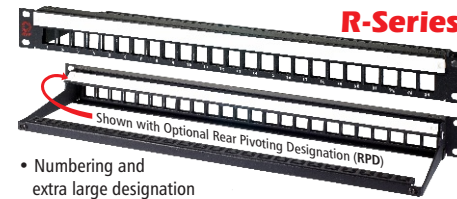

- Numbering and extra large designation
- Optional Rear Pivoting Designation\*\*
- Easy to install & configure
- Choose 4" (100mm) or 6" (150mm) customized Cable Bar System

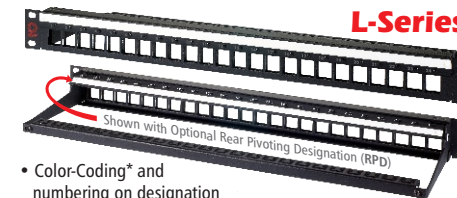

- Color-Coding\* and numbering on designation
- Optional Rear Pivoting Designation\*\* with color-coding\* & numbering
- Easy to install & configure
- Choose 4" (100mm) or 6" (150mm) customized Cable Bar System

### L-Series Color-Coding Options\*



### CIS

CIS Color Indicators are used on the front & rear designation for color-coding. Supplied Black, order colors separately.

**Ordering Information - Color-Code Indicators**

**CIS** - - -

Number of Color-Code Indicators	Indicator Color
30 Package of 30	BLACK
60 Package of 60	BROWN
100 Package of 100	RED
	ORANGE
	YELLOW
	AQUA
	GREEN
	BLUE
	PURPLE
	GRAY
	WHITE
	BEIGE
	MULTI
	MAGENTA

of each color

\*Color-Coding feature ONLY available on L-Series

**Ordering Information - Keystone Modules Only**

Model	Description
<b>ETHERNET</b>	
<b>YRJ45-6AFS #</b>	Cat6A*, RJ45, Feedthru, female to female, Shielded, black CIS
<b>YRJ45-6AS #</b>	Cat6A*, RJ45, Shielded, Tool-less or 110/Krone Punchdown, 23-26AWG, stranded or solid, black CIS
<b>YRJ45-6FS #</b>	Cat6, RJ45**, Feedthru, female to female, Shielded, black CIS
<b>YRJ45-6S #</b>	Cat6, RJ45**, Shielded, Tool-less or 110/Krone Punchdown, 23-26AWG, stranded or solid, black CIS
* For Cat3 to Cat6A shielded/unshielded applications ** For Cat3 to Cat6 shielded/unshielded applications	
<b>FIBER OPTIC SC</b>	
<b>YMMS-SC-BG</b>	SC MM SX OM1/2 Beige Adapter, Polymer Housing, Zirconia Sleeve, Adapter Plate(s) and/or Hardware
<b>YMMS-SC-AQ</b>	SC MM SX 10G OM3,4 Aqua Adapter, Polymer Housing, Zirconia Sl., Adapter Plate(s) and/or H/W
<b>YMMS-SC-MG</b>	SC MM SX 10G OM4 Magenta, Adapter, Polymer Housing, Zirconia Sl., Adapter Plate(s) and/or H/W
<b>YSMS-SC-BL</b>	SC SM SX Blue Adapter, Polymer Housing, Zirconia Sleeve, Adapter Plate(s) and/or Hardware
<b>YSMS-SC-GN</b>	SC/APC SM SX Green Adapter, Polymer Housing, Zirconia Sleeve, Adapter Plate(s) and/or Hardware
<b>FIBER OPTIC LC</b>	
<b>YMMD-LC-BG</b>	LC MM DX OM1/2 Beige Adapter, Zirconia Sleeve, SC Footprint, Adapter Plate(s) and/or Hardware
<b>YMMD-LC-AQ</b>	LC MM DX 10G OM3/4 Aqua Adapter, Zirconia Sl., SC Footprint, Adapter Plate(s) and/or Hardware
<b>YMMD-LC-MG</b>	LC MM DX 10G OM4 Magenta Adapter, Zirconia Sl., SC Footprint, Adapter Plate(s) and/or Hardware
<b>YSMD-LC-BL</b>	LC SM DX Blue Adapter, Zirconia Sleeve, SC Footprint, Adapter Plate(s) and/or Hardware
<b>YSMD-LC-GN</b>	LC/APC SM DX Green Adapter, Zirconia Sleeve, SC Footprint, Adapter Plate(s) and/or Hardware
<b>FIBER OPTIC ST</b>	
<b>YMMS-ST</b>	ST MM SX OM1/2/3/4 Metal Adapter, Zirconia Sleeve
<b>YMMS-ST-DC</b>	ST MM SX OM1/2/3/4 Metal Adapter, Zirconia Sleeve, 1 Metal Dust Cap & Chain
<b>YSMS-ST</b>	ST SM SX Metal Adapter, Zirconia Sleeve
<b>YSMS-ST-DC</b>	ST SM SX Metal Adapter, Zirconia Sleeve, 1 Metal Dust Cap & Chain
<b>BNC - 75 ohm &amp; 50 ohm</b>	
<b>YJJ300R</b>	BNC Feedthru, 24 GHz, AVP JJ300, 75 ohm, semi-recessed, F-F, premium 5u gold plating
<b>YJJ200R</b>	BNC Feedthru, 12 GHz, AVP JJ200, 75 ohm, semi-recessed, F-F, standard gold flash
<b>YBNC50-FR</b>	BNC Feedthru, 50 ohm Coaxial, semi-recessed, female-female

Other Modules Coming...