


## XLR Connector Panels

- Male and female may be mixed on the same panel
- Tapped mounting holes
- 3" [81mm] or 6" [152mm] Strain relief cable bars available

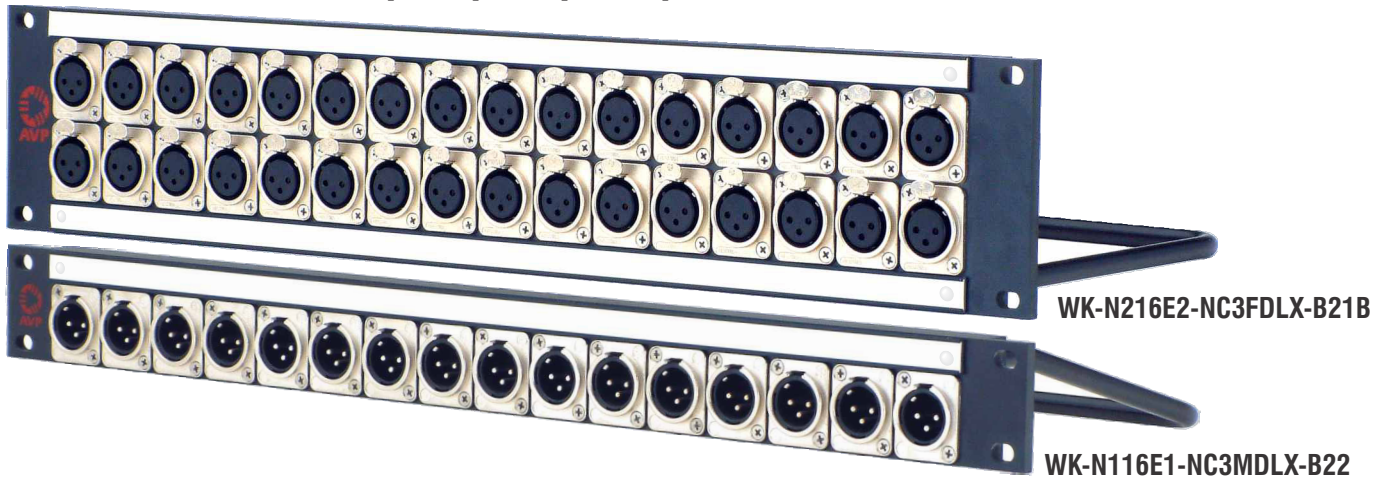

### Ordering Information

**Panel Type**

N XLR

**Number of Rows of Connectors**

- 1 1 Row of Connectors
- 2 2 Rows of Connectors, 2 RU Panels Only

**Number of Connectors per Row**

16 16 Jacks per row

**Panel Height**

- 1 1 Rack Unit 1.75", 44mm
- 2 2 Rack Unit 3.50", 89mm

**Cable Bar**

- BZ No Cable Bar
- B19 3" [81mm] Cable Bar for 1RU Panel
- B22 6" [152mm] Cable Bar for 1RU Panel
- B17B 3" [81mm] Cable Bar for 2RU Panel, at bottom
- B21B 6" [152mm] Cable Bar for 2RU Panel, at bottom

Z Empty Panel

**Neutrik Black/Gold DL Series with Solder Cups**

NC DLB1

F - Female M - Male

3, 4, 5, 6 or 7 Number of Poles

**Neutrik Black/Gold DLX Series with Solder Cups & Duplex Ground Contacts**

NC DLXB

F - Female M - Male

3, 4, 5, 6 or 7 Number of Poles

**Neutrik Nickel/Silver DL Series with Solder Cups**

NC DL1

F - Female M - Male

3, 4, 5, 6 or 7 Number of Poles

**Neutrik Nickel/Silver DLX Series with Solder Cups & Duplex Ground Contacts**

NC DLX

F - Female M - Male

3, 4, 5, 6 or 7 Number of Poles

**Cable Bar Side Views**

