Ordering Information

Model Number

WK - [ ][ ][ ][ ] E [ ] - [ ][ ][ ]

Panel Type

F	BNC, Non-recessed
G	BNC, Semi-recessed
H	F Connector

Number of Rows of Jacks

1	1 Row of Jacks
2	2 Rows of Jacks, 2 RU Panels Only
3	3 Rows of Jacks, 2 RU Panels Only

Number of Jacks per Row

16	16 Jacks per row
20	20 Jacks per row
24	24 Jacks per Row

Installed Jacks

JJ300	JJ300 BNC-BNC Connectors
HF310	HF310 F-F Connectors
Z	None (Empty Panel)

Panel Height

1	1 Rack Unit 1.75", 44mm
2	2 Rack Unit 3.50", 89mm

Options, *add to end of Model Number*

-BAR	Cable Bar

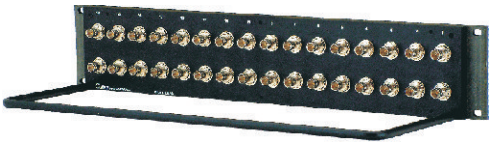

Popular Models (***Configurations up to 3x24 are available***)

Model	Description
BNC-BNC Non-recessed Connector Panels	
WK-F116E1-JJ300	1x16 position, 1RU, BNC-BNC non-recessed panel, 16 JJ300 connectors
WK-F216E2-JJ300	2x16 position, 2RU, BNC-BNC non-recessed panel, 32 JJ300 connectors
WK-F320E2-JJ300	3x20 position, 2RU, BNC-BNC non-recessed panel, 60 JJ300 connectors
WK-F216E2-Z	2x16 position, 2RU, BNC-BNC non-recessed panel, empty
BNC-BNC Semi-recessed Connector Panels	
WK-G116E1-JJ300	1x16 position, 1RU, BNC-BNC semi-recessed panel,16 JJ300 connectors
WK-G216E2-JJ300	2x16 position, 2RU, BNC-BNC semi-recessed panel, 32 JJ300 connectors
WK-G320E2-JJ300	3x20 position, 2RU, BNC-BNC semi-recessed panel, 60 JJ300 connectors
WK-G216E2-Z	2x16 position, 2RU, BNC-BNC semi-recessed panel, empty
F-F Connector Panels	
WK-H116E1-HF310	1x16 position, 1RU, F connector panel, 16 HF310 connectors
WK-H216E2-HF310	2x16 position, 2RU, F connector panel, 32 HF310 connectors
WK-H324E2-HF310	3x24 position, 2RU, F connector panel, 72 HF310 connectors

F Connector Specifications

HF310 Specifications

Description:	High Performance F-81 Barrel Splice
Body Material:	360 Grade Brass, Bright Nickel Plated
Overall Length:	1.026" (26.06mm)
Hex Size:	0.44" (11.18mm)
Nut Width:	0.147" (37.34)
Insulator Material:	Polypropylene
Center Pin Material:	Beryllium Copper



BNC Connector Specifications

JJ300 Specifications

Description:	75 ohm Double BNC Female Bulkhead
Body Material:	Brass, Bright Nickel Plated
Overall Length:	1.295" [32.90mm]
Barrel Diameter:	0.378" [9.60mm]
Nut Width:	0.551" [14.00mm]
Dielectric:	Teflon, T-02015
Center Pin:	Brass, Gold Plated